



# ProGen™

Designed  
for Life



ULTIMATE  
DURABILITY



ATTACHED PAD



PET FRIENDLY



EASY TO INSTALL



CLEANS EASILY



BEVELED EDGE

Waterproof | No Temperature Limits

PAVESTONE | CAMBRIA | 270288004

 **Tarkett**  
*Home*



# ProGen™

## The beauty of better engineering.

ProGen™ is a radical leap forward in flooring technology – a rigid core construction engineered from the inside, out – designed to outperform the rigors of daily wear. It holds up beautifully to the demands of busy, active households – from kids and pets to water and dirt. ProGen also handles sunlight and extreme temperature changes, resisting buckling, denting and warping.

With beautiful, authentic-looking designs, an easy, no-mess installation, and guaranteed long-term wear, ProGen promises a better experience every step of the way.



OUTLAND PATH | BRINDLE | 270282009



MARBLE NOUVEAU | IBIS | 270282006



PAVESTONE | LUXOR | 270288003



ULTIMATE  
DURABILITY



ATTACHED PAD



PET FRIENDLY



EASY TO INSTALL



CLEANS EASILY



BEVELED EDGE

**Waterproof | No Temperature Limits**

### Thermal Stability

Use in any room in the home. ProGen is designed to handle wide temperature fluctuations from windows and sunlight.

### Easy Installation

Its easy Uniclic® system is faster than traditional installation systems, saving you time and money.

### Durable

Resists the stresses of modern life from children to high heels to heavy furniture.

### Waterproof

Safe to use in kitchens and bathrooms for a modern look throughout the home.

### Rigid Core

Overcomes subfloor imperfections, unlike traditional luxury vinyl tile.

### Quiet

IIC rating of 68 means superior sound absorption to drastically improve overall comfort.



ProGen's next-generation technology is designed to stand up to the demands of modern life—and whatever is thrown, dropped, spilled or scraped on it. Because ProGen is durable, waterproof, dimensionally stable, and easy to install, it can be used in any room—including all-season rooms with extreme temperature changes and rooms that are most prone to moisture and spills, like kitchens and baths.



### New, Trend-Setting Designs

Make your design visions a reality through a variety of on-trend designs.



### Realistic Embossing




### Modern Painted Bevels




### Installation

| Floating Floor             | Quick and Simple Angle-Angle Click                               |
|----------------------------|--|
| Above/At/<br>Below Grade   | ✓  |
| No Acclimation             | ✓  |
| 3-Seasons Room             | ✓  |
| No Temperature Limitations | ✓  |
| Acoustic Rating            | <b>Total IIC of 68</b><br>(6" Concrete Slab + Suspended Ceiling) |

### Dimensional Stability and Durability

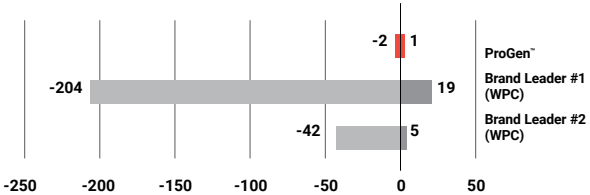

**Contraction and Expansion in Mils**  
(ASTM F2199)

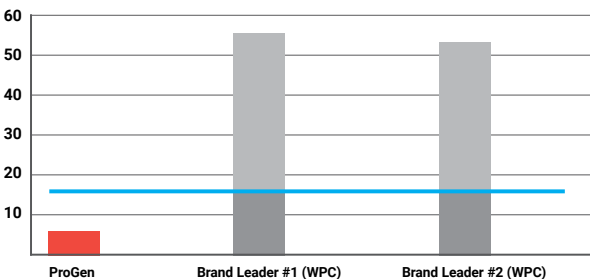

**Residual Indentation**  
(ASTM F1914 0.178" @ 140 lbs.)



**Rock Maple**  
Medio | 270264012



**Durham Pine**  
Tavern | 270264013



**Durham Pine**  
Sun-Toned | 270264014



**Stained Maple**  
Carmine | 270264015



**Red Oak**  
Ginger | 270264016



**Cerused Oak**  
Powder | 270265013



**Cerused Oak**  
Denim | 270265014



**Vista Oak**  
Limed Natural | 270265015



**Tannin Walnut**  
Gris | 270265016



**Stokes Range**  
Dusk | 270265017



**Brushed Pine**  
Sorrel | 270265019




**Chevron**  
Tawny | 270265025



7" x 48"

**Vale Oak**

Dove | 270265027

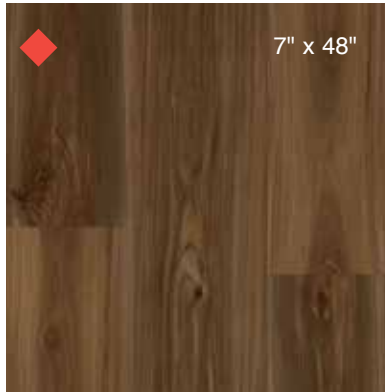

7" x 48"

**Harmony Elm**

Cocoa | 270265028



7" x 60"

**Spicebark Hickory**

Fumed | 270266016



7" x 60"

**Spicebark Hickory**


Comino | 270266017



7" x 60"

**Milled Oak**

Copper | 270266018

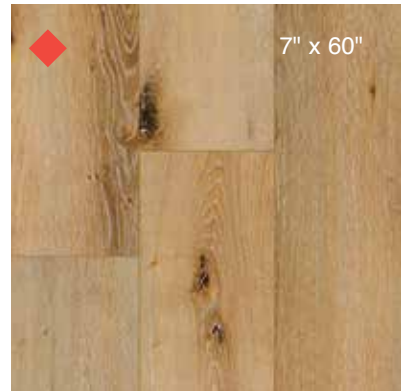

7" x 60"

**West Oak**

Natural | 270266021



7" x 60"

**West Oak**

Loft | 270266022



7" x 60"

**West Oak**

Drift | 270266024



CHEVRON | TAWNY | 270265025





**Marble Nouveau**  
Ibis | 270282006




**Quartzite**  
Dune | 270282007



**Outland Path**  
Brindle | 270282009




**Fleury Travertine**  
Verona | 270288000

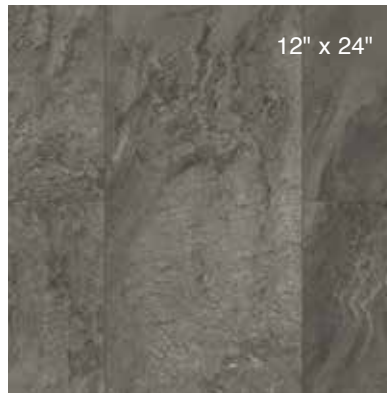


**Villa Slate**  
Spire | 270288001



**Arcadian**  
Featherstone | 270288002

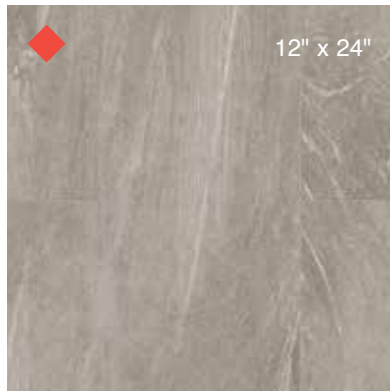


**Pavestone**  
Luxor | 270288003

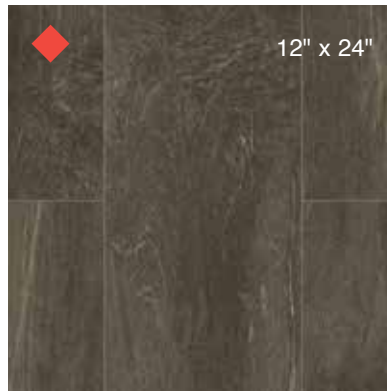

**Pavestone**  
Cambria | 270288004



**Calacatta Marble**  
Pearl | 270288006

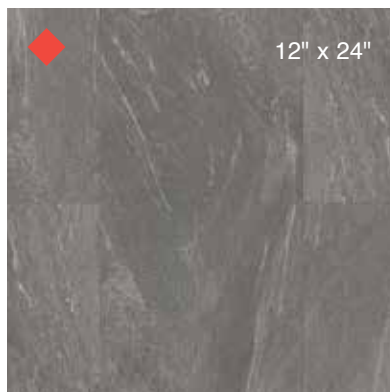

**Varenna Stone**  
Fossil | 270288007

## Matching Accessories:



T-Mold



Universal Reducer



End Cap



Stair Nose



Flush Mount Stair Nose

Stone selections to enhance your decor.





## Specifications

|   |  |                      |                      |                      |                      |
|---|--|----------------------|----------------------|----------------------|----------------------|
| Total Thickness   | 5 mm   |                      |                      |                      |                      |
| ProGen Core™ Technology   | 4 mm   |                      |                      |                      |                      |
| Acoustic Backing Layer  | 1 mm   |                      |                      |                      |                      |
| Wear Layer Thickness  | 20 mils/0,020"                                 |                      |                      |                      |                      |
| Material  | Ortho-Phthalate-Free, 100% Virgin Material     |                      |                      |                      |                      |
| Reusable Content  | 100% Reclaimable                               |                      |                      |                      |                      |
| Plank Size  | 5" x 48"                                       | 7" x 48"             | 7" x 60"             | 9" x 24"             | 12" x 24"            |
| Sq. Ft. per Carton  | 26.68 sq. ft./pi.ca.                           | 28.52 sq. ft./pi.ca. | 29.61 sq. ft./pi.ca. | 20.96 sq. ft./pi.ca. | 28.03 sq. ft./pi.ca. |
| Planks per Carton   | 16   | 12                   | 10                   | 14                   | 14                   |
| Cartons per Pallet  | 56   | 50                   | 40                   | 64                   | 54                   |
| Lbs. per Carton   | 42 lbs.  | 44 lbs.              | 45 lbs.              | 33.5 lbs.            | 45 lbs.              |
| ASTM F3261 (Rigid Polymeric Core) Specification   | Class 1, Type A or B, Grade 1, Backing Class B |                      |                      |                      |                      |
| ASTM F2199 (Dimensional Stability)  | Passes   |                      |                      |                      |                      |
| ASTM F1914 (Residual Indentation)   | Passes   |                      |                      |                      |                      |
| ASTM F1514 (Heat Stability)   | Passes   |                      |                      |                      |                      |
| ASTM F1515 (Light Stability)  | Passes   |                      |                      |                      |                      |
| ASTM E2179 (Impact Sound Reduction)   | $\Delta$ IIC $\geq$ 20 dB                      |                      |                      |                      |                      |
| ASTM E492 (6" Concrete Slab w/a Drop Ceiling Assembly/Dalle de béton de 6" avec assemblage de plafond suspendu) | IIC 68   |                      |                      |                      |                      |
| ASTM F925 (Resistance to Chemicals)   | Passes   |                      |                      |                      |                      |
| ASTM D5116 (VOC Requirements)   | Passes < 0.1 mg/m <sup>3</sup>                 |                      |                      |                      |                      |
| Scratch/Scuff/Abrasion Properties   | Excellent                                      |                      |                      |                      |                      |
| Installation System   | Uniclic®                                       |                      |                      |                      |                      |
| Residential Warranty  | Lifetime                                       |                      |                      |                      |                      |
| Light Commercial Warranty   | 15-Year  |                      |                      |                      |                      |
| 3-Seasons Warranty  | 10-Year  |                      |                      |                      |                      |
| Certification   | FloorScore® and Assure Certified™              |                      |                      |                      |                      |



VARENNA STONE | FOSSIL | 270288007



CERTIFIED BY  
SCS Global Services



CERTIFIED BY  
SCS Global Services

## Tarkett North America

30000 Aurora Road | Solon, OH 44139  
USA: 1-877-TARKETT (1-877-827-5388)  
Canada: 1-877-436-6267

[www.tarketthome.com](http://www.tarketthome.com)



Scan this code to visit  
[www.tarketthome.com](http://www.tarketthome.com)



ORTHO-PHTHALATE  
FREE

For more accurate color and pattern representation, we suggest you visit an authorized Tarkett Home dealer to view an actual product sample.