



ProGen™

Designed for Life

Waterproof

Safe to use in kitchens and bathrooms for modern looks throughout the home.

No Acclimation Required

ProGen may be used immediately. ProGen is extremely stable and has no temperature limitations, so it's great for 3-Season rooms.

Rigid Core

Overcomes subfloor imperfections and telegraphing, unlike traditional luxury vinyl tile.

Durable

Supports the everyday life of a busy, active household, like kids, pets, high heels and heavy furniture.

Easy Installation

ProGen does not require power tools and can be simply cut with a utility knife. Its fast-locking click system provides a low-cost, low-mess installation, even over existing floors.

No Transitions Required

ProGen is so stable, no transitions are required between rooms or in large spaces. However, Tarkett does offer matching transitions.

Quiet

IIC rating of 68 means superior sound absorption to drastically improve overall comfort.



ULTIMATE
DURABILITY



ATTACHED PAD



PET FRIENDLY



EASY TO INSTALL



CLEANS EASILY



BEVELED EDGE


Waterproof | No Temperature Limits

WEST OAK | NATURAL | 270266021

 **Tarkett**
Home




Rock Maple
Medio
270264012




Durham Pine
Tavern
270264013




Durham Pine
Sun-Toned
270264014



Stained Maple
Carmine
270264015




Red Oak
Ginger
270264016




Cerused Oak
Powder
270265013




Cerused Oak
Denim
270265014




Vista Oak
Limed Natural
270265015



Tannin Walnut
Gris
270265016




Stokes Range
Dusk
270265017




Brushed Pine
Sorrel
270265019



Chevron
Tawny
270265025




Vale Oak
Dove
270265027




Harmony Elm
Cocoa
270265028



Spicebark Hickory
Fumed
270266016



Spicebark Hickory
Comino
270266017




Milled Oak
Copper
270266018



West Oak
Natural
270266021



West Oak
Loft
270266022




West Oak
Drift
270266024




A Selection of Stone Patterns




Marble Nouveau
Ibis
270282006



Quartzite
Dune
270282007




Outland Path
Brindle
270282009




Fleury Travertine
Verona
270288000




Villa Slate
Spire
270288001



Arcadian
Featherstone
270288002




Pavestone
Luxor
270288003



Pavestone
Cambria
270288004



Calacatta Marble
Pearl
270288006



Varenna Stone
Fossil
270288007

Create beautiful transitions
with matching T-moldings,
stair nosings and reducers.

Specifications


Total Thickness	5 mm				
ProGen Core™ Technology	4 mm				
Acoustic Backing Layer	1 mm				
Wear Layer Thickness	20 mils/0,020"				
Material	Ortho-Phthalate-Free, 100% Virgin Material				
Reusable Content	100% Reclaimable				
Plank Size	5" x 48"	7" x 48"	7" x 60"	9" x 24"	12" x 24"
Sq. Ft. per Carton	26.68 sq. ft./pi.ca.	28.52 sq. ft./pi.ca.	29.61 sq. ft./pi.ca.	20.96 sq. ft./pi.ca.	28.03 sq. ft./pi.ca.
Planks per Carton	16	12	10	14	14
Cartons per Pallet	56	50	40	64	54
Lbs. per Carton	42 lbs.	44 lbs.	45 lbs.	33.5 lbs.	45 lbs.
ASTM F3261 (Rigid Polymeric Core) Specification	Class 1, Type A or B, Grade 1, Backing Class B				
ASTM F2199 (Dimensional Stability)	Passes				
ASTM F1914 (Residual Indentation)	Passes				
ASTM F1514 (Heat Stability)	Passes				
ASTM F1515 (Light Stability)	Passes				
ASTM E2179 (Impact Sound Reduction)	Δ IIC \geq 20 dB				
ASTM E492 (6" Concrete Slab w/a Drop Ceiling Assembly)	IIC 68				
ASTM F925 (Resistance to Chemicals)	Passes				
ASTM D5116 (VOC Requirements)	Passes < 0.1 mg/m ³				
Scratch/Scuff/Abrasion Properties	Excellent				
Installation System	Uniclic®				
Residential Warranty	Lifetime				
Light Commercial Warranty	15-Year				
3-Seasons Warranty	10-Year				
Certification	FloorScore® and Assure Certified™				



Installation

Floating Floor	Quick and Simple Angle-Angle Click
Above/At/Below Grade	✓
No Acclimation	✓
No Transition Required	✓
No Temperature Limitations/ Direct Sunlight Install	✓
Acoustic Rating	Total IIC of 68 (6" Concrete Slab + Suspended Ceiling)

Extreme Temperature Expansion and Contraction (ASTM F2199)

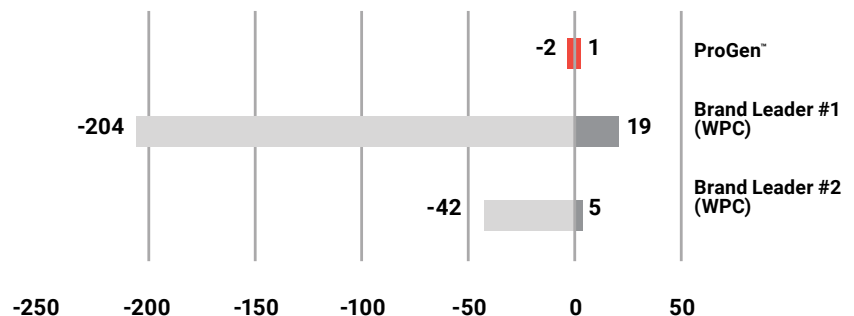

Tarkett North America

30000 Aurora Road | Solon, OH 44139
 USA: 1-877-TARKETT (1-877-827-5388)
 Canada: 1-877-436-6267

www.tarketthome.com



Scan this code to visit
www.tarketthome.com



For more accurate color and pattern representation, we suggest you visit an authorized Tarkett Home dealer to view an actual product sample.